


Data sheet

MiniXtend - Cable

Mini Duct Cable

with 2 - 12 Corning[®] single-mode fibers E9/125 SMF-28[®]ULTRA with low-loss and improved bend performance technologies

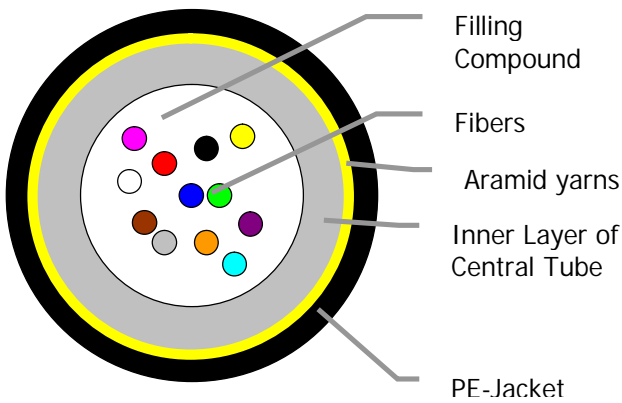

Principle drawing for a A-D(ZN)2Y 1x12 E9ULTRA/125 0.34F3.5 + 0.20H18

Features & Benefits

Dual layer central tube design and the PE sheath provides

- Optimized cable stiffness and low friction sheath material for excellent installation performance
- Good mechanical and environmental properties
- Fully dielectric duct cable requires no grounding
- The used Corning[®] single-mode fiber SMF-28[®]ULTRA optical fiber is an ITU-T G652.D compliant optical fiber with Corning's enhanced low loss and bend technologies. This full-spectrum fiber has bend performance that exceeds the ITU-T G.657.A1 standard and still splices the same as the installed base of standard SM fibers such as SMF28e+[®]

Cable type	Fibers	Diameter (mm)	Weight (kg/km)	Bending radius (mm)
A-D(ZN)2Y 1x2	2	2,5	4,5	20
A-D(ZN)2Y 1x4	4	2,5	4,5	20
A-D(ZN)2Y 1x6	6	2,5	4,5	20
A-D(ZN)2Y 1x8	8	2,5	4,5	20
A-D(ZN)2Y 1x12	12	2,5	4,5	20

© 2015 Corning Incorporated. All Rights Reserved.

Archive: CCS AE
15-07-08 MiniXtend A-D(ZN)2Y 2 - 12E9 ULTRA CT 2,5mm Corning e

CCS reserves the right to improve, enhance, and modify the features and specifications of CCS's products without prior notification. The information in this data sheet has been reproduced in good faith and is accurate, to the best of CCS's knowledge, at the time of printing. However, CCS makes no warranty as to, and will not be liable on any basis for, the information contained within this data sheet.

Data sheet

Colour coding

Fibers: blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
 Jacket: black

Cable printing: M + Handset + Sinus + CORNING + Year +
 MINIXTEND(R) CABLE A-D(ZN)2Y n* E9-ULTRA CT1.7

Method: Laser

Characteristics of fibers SMF-28[®] ULTRA (low loss and bend improved fiber)

Optical and mechanical:

Mode field diameter at 1310 nm	[μm]	9.2 ± 0.4
Cladding diameter	[μm]	125.0 ± 0.7
Coating diameter	[μm]	242 ± 5
Attenuation at 1310 nm	[dB/km]	≤ 0.34
Attenuation at 1550 nm	[dB/km]	≤ 0.20
Attenuation at 1383 nm	[dB/km]	≤ 0.34
Dispersion in the range 1285 to 1330 nm	[ps/(nm*km)]	≤ 3.5
Max.Dispersion at 1550 nm	[ps/(nm*km)]	≤ 18
Cable cutoff Wavelength (λ_{cc})	[nm]	≤ 1260
PMD cabled (link value)	Ps/ $\sqrt{\text{km}}$	$\leq 0,04^*$
Max.PMD cabled (single fiber)	Ps/ $\sqrt{\text{km}}$	$\leq 0,1$

*) Complies with IEC 60794-3:2001, Section 5.5, Method 1 (m=20,Q=0,01%)

The fibers is fully compliant with ITU-T G.652.D standard and exceeds ITU-T G.657.A1 standard

Characteristics of cable

Mechanical and environmental:

Tensile strength during installation	[N]	80
Impact resistance (3 impacts, 300mm hammer radius)	[Nm]	1
Crush resistance	[N/10 cm]	850
Operation temperature range	[°C]	-20...+70
Installation temperature range	[°C]	-5...+50
Water penetration (0.1 bar, 24 h)	m	≤ 1

Delivery:

Delivery length up to 6 km

© 2015 Corning Incorporated. All Rights Reserved.

Archive: CCS AE
 15-07-08 MiniXtend A-D(ZN)2Y 2 - 12E9 ULTRA CT 2,5mm Corning e

CCS reserves the right to improve, enhance, and modify the features and specifications of CCS's products without prior notification. The information in this data sheet has been reproduced in good faith and is accurate, to the best of CCS's knowledge, at the time of printing. However, CCS makes no warranty as to, and will not be liable on any basis for, the information contained within this data sheet.